

India & South Africa - Type BS 546 SABS 164-1992 15-16A / 250V

Male Plug: TypeBS 546 15-16A/250V
Colors: white, light and dark gray, black
Length: any length available

Color Code: brown, blue, green/yellow
Termination: per your specs



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
LLOO-1307	PVC	3x0.75mm ²	5.6mm	6A/250V	H03VV-F3G0.75
LLOO-1308	PVC	3x0.75mm ²	6.4mm	6A/250V	H05VV-F3G0.75
LLOO-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0
LLOO-1315	PVC	3x1.5mm ²	7.9mm	16A/250V	H05VV-F3G1,5
LLOO-2308	Rubber	3x0.75mm ²	6.4mm	6A/250V	H05RR-F3G0.75
LLOO-2310	Rubber	3x1.0mm ²	6.9mm	10A/250V	H05RR-F3G1.0
LLOO-3308	Neoprene	3x0.75mm ²	6.5mm	6A/250V	H05RN-F3G0.75
LLOO-3310	Neoprene	3x1.0mm ²	6.9mm	10A/250V	H05RN-F3G1.0
LLOO-3311	Neoprene	3x1.0mm ²	8.8mm	10A/250V	H07RN-F3G1.0
LLOO-3315	Neoprene	3x1.5mm ²	9.7mm	16A/250V	H07RN-F3G1.5

Detachable Cord Sets

Male Plug: See above
Connector: IEC 320/C13 EN60320 10A/250V
Colors: white, light & dark gray, black
Length: any length available

Male Plug Approval: BSI
Connector Approval: ENEC, KEMA
Color Code: brown, blue, green/yellow



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
LLBL-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
LLBL-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0

Male Plug: See above

Connector: IEC 320/C13 EN60320 10A/250V


Colors: white, light & dark gray, black

Length: any length available

Male Plug Approval: BSI

Connector Approval: ENEC, KEMA

Color Code: brown, blue, green/yellow

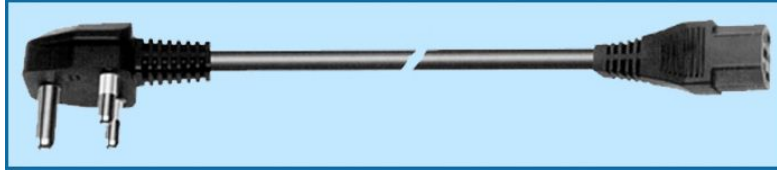

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
LLBS-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
LLBS-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0

Male Plug: See above

Connector: IEC 320/C13 EN60320 10A/250V


Colors: white, light & dark gray, black

Length: any length available

Male Plug Approval: BSI

Connector Approval: ENEC, KEMA

Color Code: brown, blue, green/yellow

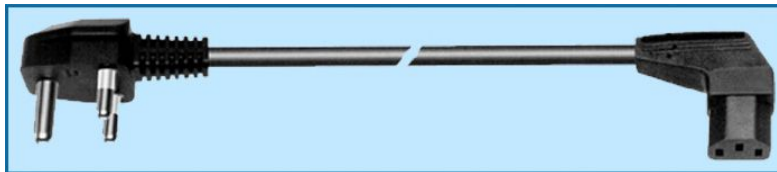

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
LLBR-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
LLBR-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0

*Max length 2 meters (6.6 ft.)

For use in the following Countries:

Bhutan, India, Israel, Lesotho, Macau, Malaysia, Mozambique, Namibia, Nepal, Pakistan, Singapore, South Africa, South Sudan, Sri Lanka, Sudan, Swaziland