

ITALY - 10A / 250V CEI 23-50:2007+V1:2008+V2:2011

Male Plug: 10A/250V CEI 23-50:2007
Colors: white, light & dark gray, black
Length: any length available

Approval: IMQ
Color Code: brown, blue, green/yellow
Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
IIOO-1308	PVC	3x0.75mm ²	6.4mm	6A/250V	H05VV-F3G0.75
IIOO-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0
IIOO-3310	Neoprene	3x1.0mm ²	6.9mm	10A/250V	H05RN-F3G1.0

DETACHABLE CORD SETS

Male Plug: See above
Connector: IEC 320/C13 EN60320 10A/250V
Colors: white, light & dark gray, black
Length: any length available


Male Plug Approval: IMQ
Connector Approval: ENEC, KEMA
Color Code: brown, blue, green/yellow



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
IIBL-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
IIBL-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0

Male Plug: See above
Connector: IEC 320/C13 EN60320 10A/250V
Colors: white, light & dark gray, black
Length: any length available


Male Plug Approval: IMQ
Connector Approval: ENEC, KEMA
Color Code: brown, blue, green/yellow

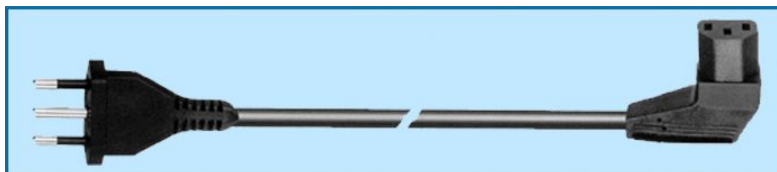

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
IIBS-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
IIBS-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0

Male Plug: See above
Connector: IEC 320/C13 EN60320 10A/250V
Colors: white, light & dark gray, black
Length: any length available

Male Plug Approval: IMQ
Connector Approval: ENEC, KEMA
Color Code: brown, blue, green/yellow

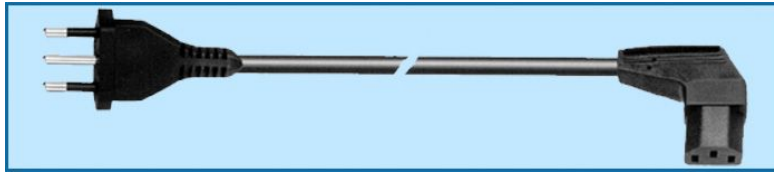

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
IIBR-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
IIBR-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G1.0


*Max length 2 meters (6.6 ft.)

2 CONDUCTOR CORD SET

Available with 2-conductor female plug: see Universal Cord Sets

Male Plug: 10A/250V CEI 50:2007
Colors: white, light & dark gray, black
Length: any length available

Termination: per your specifications
Color Code: brown, blue

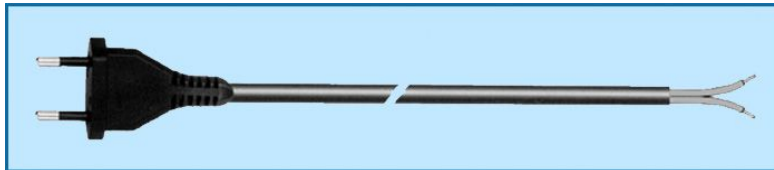

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
IIOO-1210	PVC	2x1.0mm ²	6.4mm	10A/250V	H05VV-F2x1.0

For use In The Following Countries:

Chile, Eritrea, Ethiopia, Italy, Libya, Maldives, San Marino, Syrian Arab Republic, Uruguay

*Max length 2 meters (6.6 ft.)