


International Jumper Cord

Plugs on the left can be supplied with any termination/plug on the right



HR

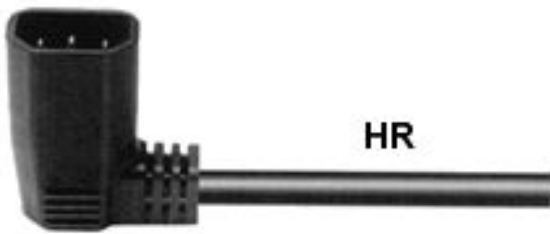

HS



HL



OO



BL



BS



BR

RATED 10A/250V

MOLDED MALE and FEMALE PLUGS

Male Plug: IEC 320/C14
Rating: 10A/250V
Approval: ENEC, KEMA

Colors: white, light and dark gray, black
Color Code: brown, blue, green/yellow
Length: any length available

Connector: IEC 320/C13
Rating: 10A/250V
Approval: ENEC, KEMA

Part No.	Material	Conductors	App. Dia.	Rating	Type of HAR Cord
HROO-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HROO-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HRBL-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HRBL-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HRBS-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HRBS-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HRBR-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HRBR-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HOOO-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HOOO-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HSBL-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HSBL-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HSBS-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HSBS-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HSBR-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HSBR-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HLOO-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HLOO-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HLBL-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HLBL-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HLBS-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HLBS-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0
HLBR-1308	PVC	3x0.75mm ²	6.4mm	10A/250V	H05VV-F3G0.75*
HLBR-1310	PVC	3x1.0mm ²	6.8mm	10A/250V	H05VV-F3G 1.0

*Max length 2 meters (6.6 ft.)


RATED 16A/250V

Male Plug: IEC 320/C20
Rating: 16A/250V
Approvals: VDC

Colors: black
Color Code: blue, brown, green/yellow
Length: any length available

Connector: IEC 320/C19 EN60320, BS449
Rating: 16A/250V
Approval: ENEC, KEMA

Plugs on the left can be supplied with any termination/plug on the right

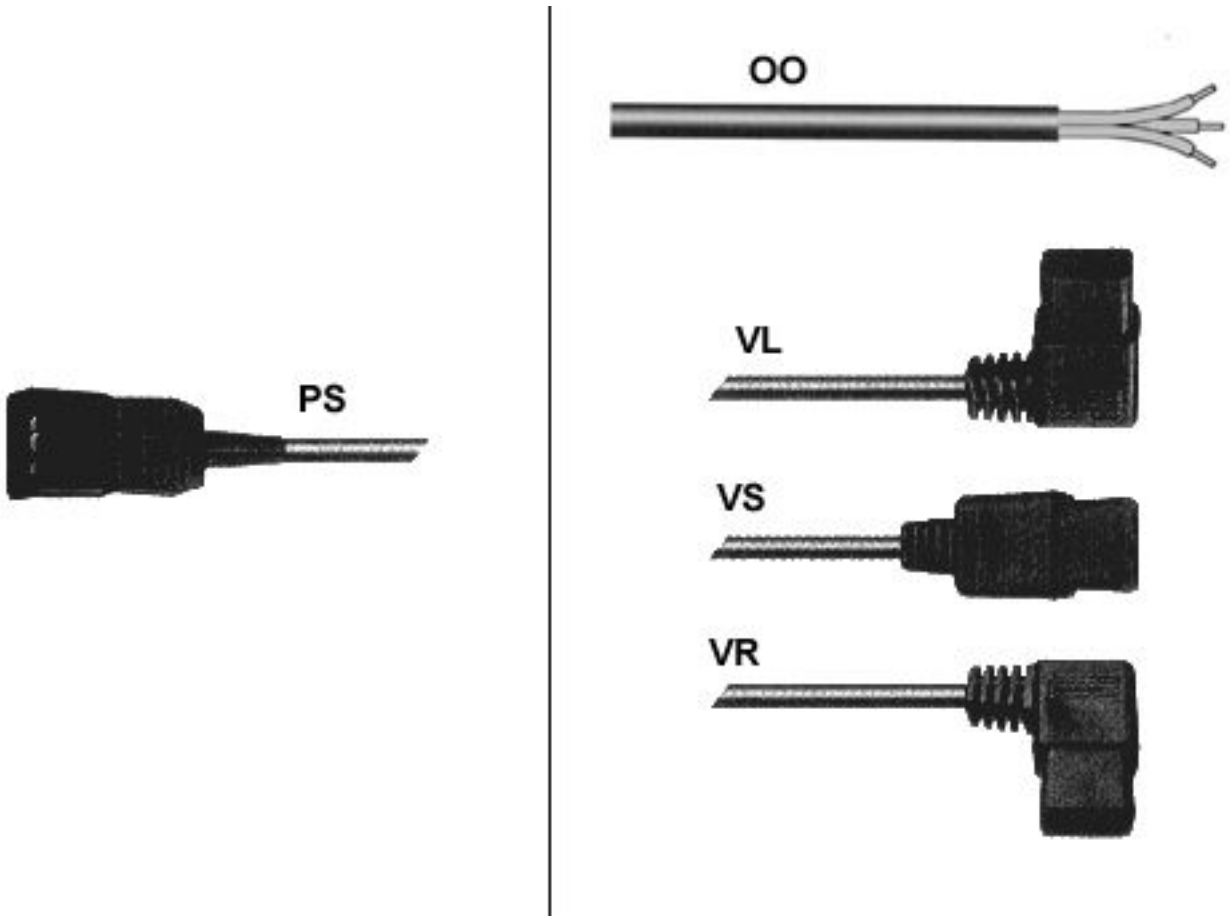

Part No.	Material	Conductors	App. Dia.	Rating	Type of HAR Cord
PSOO-1315	PVC	3x1.5mm ²	7.9mm	16A/250V	H05VV-F3G1.5
PSVL-1315	PVC	3x1.5mm ²	7.9mm	16A/250V	H05VV-F3G1.5
PSVS-1315	PVC	3x1.5mm ²	7.9mm	16A/250V	H05VV-F3G1.5
PSVR-1315	PVC	3x1.5mm ²	7.9mm	16A/250V	H05VV-F3G1.5