


## CONNECTORS RATED 10A / 250V - 3 CONDUCTOR CORD SETS

Specifications: IEC 320/C 13 EN 60320 BS4491 10A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Approvals: ENEC, KEMA  
 Color Code: brown, blue, green/yellow  
 Termination: per your specifications

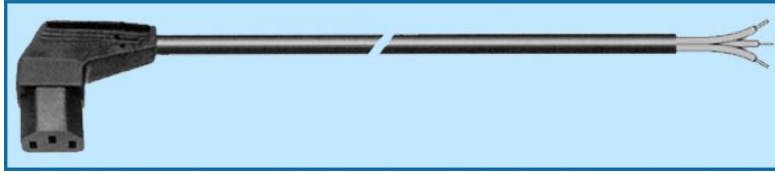

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOBL-1308	PVC	3x0.75mm <sup>2</sup>	6.4mm	6A/250V	H05VV-F3G0.75*
OOBL-1310	PVC	3x1.0mm <sup>2</sup>	6.8mm	10A/250V	H05VV-F3G1.0

Specifications: IEC 320/C 13 EN 60320 BS4491 10A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Approvals: ENEC, KEMA  
 Color Code: brown, blue, green/yellow  
 Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOBS-1308	PVC	3x0.75mm <sup>2</sup>	6.4mm	6A/250V	H05VV-F3G0.75
OOBS-1310	PVC	3x1.0mm <sup>2</sup>	6.8mm	10A/250V	H05VV-F3G1.0
OOBS-3310	Neoprene	3x1.0mm <sup>2</sup>	6.9mm	10A/250V	H05RN-F3G1.0
Shielded (braided copper, 85% coverage) black only - No Approval					
OOBS-5310	PVC	3x1.0mm <sup>2</sup>	7.1mm	10A/250V	S05VC4V-F3G1.0

Specifications: IEC 320/C 13 EN 60320 BS4491 10A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Approvals: ENEC, KEMA  
 Color Code: brown, blue, green/yellow  
 Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOBR-1308	PVC	3x0.75mm <sup>2</sup>	6.4mm	6A/250V	H05VV-F3G0.75
OOBR-1310	PVC	3x1.0mm <sup>2</sup>	6.8mm	10A/250V	H05VV-F3G1.0

**2 CONDUCTOR CORD SETS**

Specifications: IEC 320/C 17 EN 60320 10A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Color Code: brown, blue  
 Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOBS-1208	PVC	2x0.75mm <sup>2</sup>	6.0mm	6A/250V	H05VV-F2X.75
OOBS-1210	PVC	2x1.0mm <sup>2</sup>	6.4mm	10A/250V	H05VV-F2X1.0

**CONNECTORS RATED 16A/250V**

Specifications: EC 320 / EN 60320 / C19 16A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Approvals: ENEC, KEMA  
 Color Code: brown, blue, green/yellow  
 Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOVR-1315	PVC	3x1.5mm <sup>2</sup>	7.9mm	16A/250V	H05VV-F3G1.5

Specifications: IEC 320 / EN 60320 / C19 16A/250V  
 Colors: white, light and dark gray, black  
 Length: any length available

Approvals: ENEC, KEMA  
 Color Code: brown, blue, green/yellow  
 Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOVS-1315	PVC	3x1.5mm <sup>2</sup>	7.9mm	16A/250V	H05VV-F3G1.5

Specifications: IEC 320/C 13 EN 60320 BS4491 10A/250V

Colors: white, light and dark gray, black

Length: any length available

Approvals: ENEC, KEMA

Color Code: brown, blue, green/yellow

Termination: per your specifications



Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
OOVR-1315	PVC	3x1.5mm <sup>2</sup>	7.9mm	16A/250V	H05VV-F3G1