

RUSSIA
Male Plug: 16A/250V

Colors: white, light and dark gray, black

Length: any length available

Color Code: brown, blue, green/yellow

Termination: per your specs


Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
NNOO-1307	PVC	3x0.75mm ²	5.6mm	6A/250V	H03VV-F3G0.75
NNOO-1308	PVC	3x0.75mm ²	6.6mm	6A/250V	H05VV-F3G0.75
NNOO-1310	PVC	3x1.0mm ²	6.9mm	10A/250V	H05VV-F3G1.0
NNOO-1315	PVC	3x1.5mm ²	8.2mm	16A/250V	H05VV-F3G1.5
NNOO-2308	Rubber	3x0.75mm ²	7.0mm	6A/250V	H05RR-F3G0.75
NNOO-2310	Rubber	3x1.0mm ²	7.4mm	10A/250V	H05RR-F3G1.0


DETACHABLE CORD SETS
Male Plug: 16A/250V

Colors: white, light and dark gray, black

Length: any length available

Female Plug: IEC 320/C 13 EN60320 10A/250V


Approvals: VDE, KEMA, CB Certificate

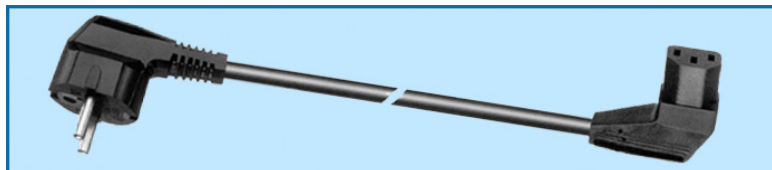Color Code: brown, blue, green/yellow


Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
NNBL-1308	PVC	3x0.75mm ²	6.6mm	6A/250V	H05VV-F3G0.75*
NNBL-1310	PVC	3x1.0mm ²	6.9mm	10A/250V	H05VV-F3G1.0

Male Plug: 16A/250V
Colors: white, light and dark gray, black
Length: any length available

Female Plug: IEC 320/C 13 EN60320 10A/250V
Approvals: CEBEC, EANSW, KEMA, NEMKO, SEMKO, SEV, VDE, CB Certificate
Color Code: brown, blue, green/yellow

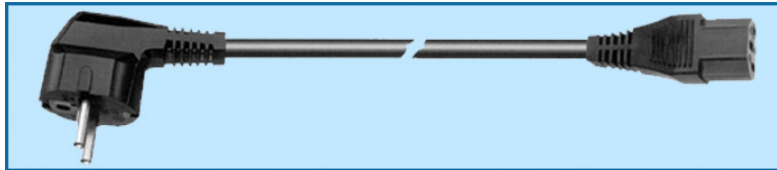


ABS series cord set

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
NNBS-1308	PVC	3x0.75mm ²	6.6mm	6A/250V	H05VV-F3G0.75*
NNBS-1310	PVC	3x1.0mm ²	6.9mm	10A/250V	H05VV-F3G1.0

Male Plug: 16A/250V
Colors: white, light and dark gray, black
Length: any length available

Female Plug: IEC 320/C 13 EN60320 10A/250V
Approvals: VDE, KEMA, CB Certificate
Color Code: brown, blue, green/yellow

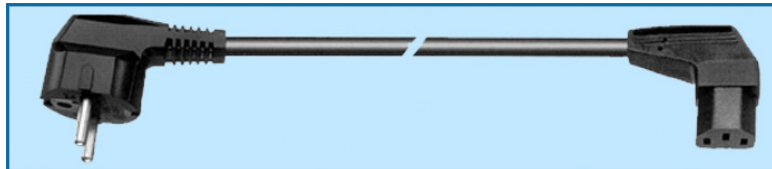

Part No.	Material	Conductors	App. Dia.	Rating	Int'l Cord Specs
NNBR-1308	PVC	3x0.75mm ²	6.6mm	6A/250V	H05VV-F3G0.75*
NNBR-1310	PVC	3x1.0mm ²	6.9mm	10A/250V	H05VV-F3G1.0

For use In The Following Countries:

Chile, Eritrea, Ethiopia, Italy, Libya, Maldives, San Marino, Syrian Arab Republic, Uruguay

*Max length 2 meters (6.6 ft.)